

MINGSTAR ELECTRONIC CORPORATION

Spec. No.	233-220-039
-----------	-------------

Version : 2


Total pages: 20

Date : 1998/08/17

MTL25D01 COLOR TFT-LCD PRELIMINARY SPECIFICATION

MODEL NAME: MTL25D01

The content of this technical information
is subject to change without notice.
Please contact Mingstar or its agent for
further information.

Approved by	Checked by	Prepared by
		

Contents:

A. Physical specifications	P3
B. Electrical specifications	P4
1. Pin assignment	P4
a. TFT-LCD panel driving section	P4
b. Backlight driving section	P5
2. Absolute maximum ratings	P5
3. Electrical characteristics	P6
a. Typical operating conditions	P6
b. Current consumption	P6
c. Backlight driving conditions	P6
4. AC Timing	P7
a. Timing conditions	P7
b. Timing diagram	P7
C. Optical specifications	P8
D. Reliability test items	P10
E. Packing form	P11

Appendix:

Fig.1 Outline dimension of TFT-LCD module	P12
Fig.2 Sampling clock timing	P13
Fig.3 Horizontal display timing range	P14
Fig.4-(a) Horizontal timing	P15
Fig.4-(b) Detail horizontal timing	P16
Fig.5 Vertical shift clock timing	P17
Fig.6-(a) Vertical timing (From up to down)	P18
Fig.6-(b) Vertical timing (From down to up)	P19

A.Physical specifications

NO.	Item	Specification	Remark
1	Display resolution(dot)	480(W) × 234(H)	
2	Active area(mm)	50.21(W) × 37.67(H)	
3	Screen size(inch)	2.47(Diagonal)	
4	Dot pitch(mm)	0.105(W) × 0.161(H)	
5	Color configuration	R.G.B delta	
6	Overall dimension(mm)	61.60(W) × 49.3(H) × 6.6(D)	Note 1
7	Weight(g)	35±5	

Note 1 : Refer to Fig. 1

B.Electrical specifications

1.Pin assignment

a. TFT-LCD panel driving section

Pin no.	Symbol	i/o	Description	Remark
1	STHL	i/o	Start pulse for horizontal scan line	Note 1
2	OEH	i	Output enable input for data driver	
3	Q1H	i	Analog signal rotate input	
4	CPH1	i	Sampling and shifting clock pulse for data driver	
5	CPH2	i	Sampling and shifting clock pulse for data driver	
6	CPH3	i	Sampling and shifting clock pulse for data driver	
7	GND	-	Ground	
8	VB	i	Alternated video signal input(Blue)	
9	VG	i	Alternated video signal input(Green)	
10	VR	i	Alternated video signal input(Red)	
11	NC	-	This pin should be electrical opened during operation	
12	L/R	i	Left/Right scan control input	Note 1,2
13	STHR	i/o	Start pulse for horizontal scan line	Note 1
14	AV _{DD}	i	Supply voltage for analog circuit	
15	VCOM	i	Common electrode driving signal	
16	V _{GH}	i	Positive power for scan driver	
17	V _{CC}	i	Logic power for scan & data driver	
18	STVL	i/o	Vertical start pulse	Note 1
19	OEV	i	Output enable input for scan driver	
20	CKV	i	Shift clock input for scan driver	
21	U/D	i	UP/DOWN scan control input	Note 1,2
22	STVR	i/o	Vertical start pulse	Note 1
23	NC	-	This pin should be electrical opened during operation	
24	V _{GL}	i	Negative power for scan driver	


Note 1 : Selection of scanning mode

Setting of scan control input		IN/OUT state for start pulse				Scanning direction
U/D	L/R	STVR	STVL	STHR	STHL	
GND	V _{CC}	OUT	IN	OUT	IN	From up to down, and from left to right.
V _{CC}	GND	IN	OUT	IN	OUT	From down to up, and from right to left.
GND	GND	OUT	IN	IN	OUT	From up to down, and from right to left.
V _{CC}	V _{CC}	IN	OUT	OUT	IN	From down to up, and from left to right.

IN: Input; OUT: Output.

Note 2 : Definition of scanning direction.

Refer to figure as below:

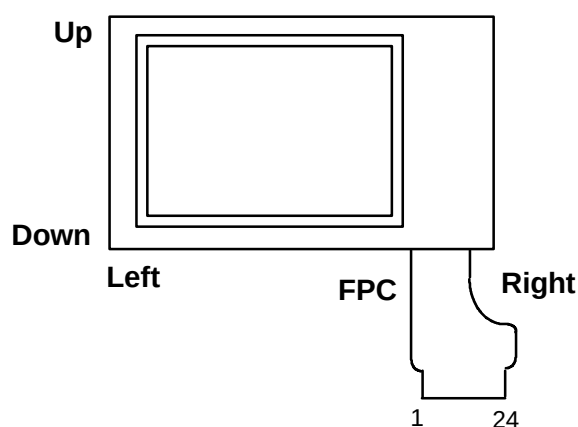

b. Backlight driving section(Refer to Fig.1)

No.	Symbol	I/O	Description	Remark
1	HI	i	Power supply for backlight unit (High voltage)	
2	GND	-	Ground	

2.Absolute maximum ratings

Item	Symbol	Condition	Min.	Max.	Unit	Remark
Power voltage	V _{CC}	GND=0	-0.3	7	V	
	AV _{DD}	AV _{SS} =0	-0.3	7	V	
	V _{GH}	GND=0	-0.3	18	V	
	V _{GL}		-15	0.3	V	
	V _{GH} - V _{GL}		-	31	V	
Input signal voltage	V _i		-0.3	AV _{DD} +0.3	V	Note 1
	V _i		-0.3	V _{CC} +0.3	V	Note 2
	V _{COM}		-2.9	5.2	V	
Operating temperature	Topa		0	60	°C	Ambient temperature
Storage temperature	Tstg		-25	80	°C	Ambient temperature

Note 1: VR,VG,VB

Note 2: STHL,STHR,Q1H,OEHL,L/R,CPH1 ~ CPH3,STVR,STVL,OEVL,CKV,U/D

3. Electrical characteristics

a. Typical operating conditions (GND=AV_{SS}=0, Note 5)

Item	Symbol	Min.	Typ.	Max.	Unit	Remark
Power supply	V _{CC}	4.8	5	5.2	V	
	AV _{DD}	4.8	5	5.2	V	
	V _{GH}	14.3	15	15.7	V	
	V _{GLAC}	3.5	5	7.5	Vp-p	AC component of V _{GL} , Note 1
	V _{GLDC}	-10.5	-10	-9.5	V	DC component of V _{GL}
Video signal amplitude (VR, VG, VB)	V _{IA}	AV _{SS} +0.4	-	AV _{DD} -0.4	V	Note 2
	V _{IAc}	-	3	-	V	AC component
	V _{IDC}	-	AV _{DD} /2	-	V	DC component
VCOM	V _{CAC}	3.5	5	7.5	Vp-p	AC component, Note 3
	V _{CDC}	-	1.1	-	V	DC component
Input signal voltage	H Level	V _{IH}	4	-	V _{CC}	Note 4
	L Level	V _{IL}	0	-	1	

Note 1: The same phase and amplitude with common electrode driving signal(VCOM).

Note 2: Refer to Fig.4-(a)

Note 3: The brightness of LCD panel could be changed by adjusting the AC component of VCOM.

Note 4: STHL,STHR,Q1H,L/R,CPH1 ~ CPH3,STVR,STVL,OEV,CKV,U/D.

Note 5: Be sure to apply GND,V_{CC},V_{GL} to the LCD first,and then apply V_{GH} .

b. Current consumption (GND=AV_{SS}=0V)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Current for driver	I _{GH}	V _{GH} =15V	-	50	100	μA	
	I _{GL}	V _{GL} = -10V	-	-0.2	-0.4	mA	
	I _{CC}	V _{CC} =5V	-	1.7	3.5	mA	
	I _{DD}	AV _{DD} =5V	-	4.5	9	mA	

c. Backlight driving conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
Lamp voltage	V _L	210	230	250	Vrms	
Lamp current	I _L	2.4	2.7	3.0	mA _{rms}	
Frequency	F _L	55	60	65	KHz	
Lamp Starting Voltage	V _S	-	-	460	Vrms	Note 1
		-	-	690	Vrms	Note 2

Note 1: Ta = 25 °C

Note 2: Ta = 0 °C

4.AC Timing

a.Timing conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit.	Remark
Rising time	t_r	-	-	10	ns	Note 1
Falling time	t_f	-	-	10	ns	Note 1
High and low level pulse width	t_{CPH}	299	308	319	ns	CPH1~CPH3
CPH pulse duty	t_{CWH}	40	50	60	%	CPH1~CPH3
CPH pulse delay	t_{C12} t_{C23} t_{C31}	70	$t_{CPH}/3$	$t_{CPH}/2$	ns	CPH1 ~ CPH3
STH setup time	t_{SUH}	35	-	-	ns	STHR,STHL
STH hold time	t_{HDH}	35	-	-	ns	STHR,STHL
STH pulse width	t_{STH}	-	1	-	t_{CPH}	STHR,STHL
STH period	t_H	61.5	63.5	65.5	μs	STHR,STHL
OEH pulse width	t_{OEH}	-	3	-	t_{CPH}	OEH
Sample and hold disable time	t_{DIS1}	-	28	-	t_{CPH}	
OEV pulse width	t_{OEV}	-	12	-	t_{CPH}	OEV
CKV pulse width	t_{CKV}	16	28	40	t_{CPH}	CKV
Clean enable time	t_{DIS2}	-	10	-	t_{CPH}	
Horizontal display start	t_{SH}	-	0	-	$t_{CPH}/3$	
Horizontal display timing range	t_{DH}	-	480	-	$t_{CPH}/3$	
STV setup time	t_{SUV}	400	-	-	ns	STVL,STVR
STV hold time	t_{HDV}	400	-	-	ns	STVL,STVR
STV pulse width	t_{STV}	-	-	1	t_H	STVL,STVR
Horizontal lines per field	t_V	256	262	268	t_H	Note 2
Vertical display start	t_{SV}	-	3	-	t_H	
Vertical display timing range	t_{DV}	-	234	-	t_H	
VCOM rising time	t_{rCOM}	-	-	3	μs	
VCOM falling time	t_{fCOM}	-	-	3	μs	
VCOM delay time	t_{DCOM}	-	-	3	μs	
RGB delay time	t_{DRGB}	-	-	1	μs	

Note 1: For all of the logic signals.

Note 2: Please don't use odd horizontal lines to drive LCD panel for both odd and even fields simultaneously.

b.Timing diagram

Please refer to the attached drawings, from Fig.2 to Fig.6.

C.Optical specifications (Note 1,Note 2, Note 3)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Response time	Rise	$\theta = 0^\circ$	-	25	50	ms	Note 4,6
	Fall		-	30	60	ms	
Contrast ratio	CR	At optimized viewing angle	60	150			Note 5,6
Viewing angle	Top	$CR \geq 10$	10	-	-	deg.	Note 6,7
	Bottom		30	-	-		
	Left		45	-	-		
	Right		45	-	-		
Brightness	Y_L	$\theta = 0^\circ$	200	250	-	nit	Note 8
White chromaticity	x	$\theta = 0^\circ$	0.25	0.3	0.35		Note 8
	y		0.3	0.35	0.4		

Note 1. Ambient temperature = 25 °C, and lamp current $I_L=2.7\text{mA}_{rms}$.


Note 2. To be measured in the dark room.

Note 3. To be measured at the center area of panel with a viewing cone of 1° by Topcon luminance meter BM-7, after 10 minutes operation.

Note 4. Definition of response time:

The output signals of photodetector are measured when the input signals are changed from "black" to "white"(falling time) and from "white" to "black"(rising time),respectively.

The response time is defined as the time interval between the 10% and 90% of amplitudes. Refer to figure as below.

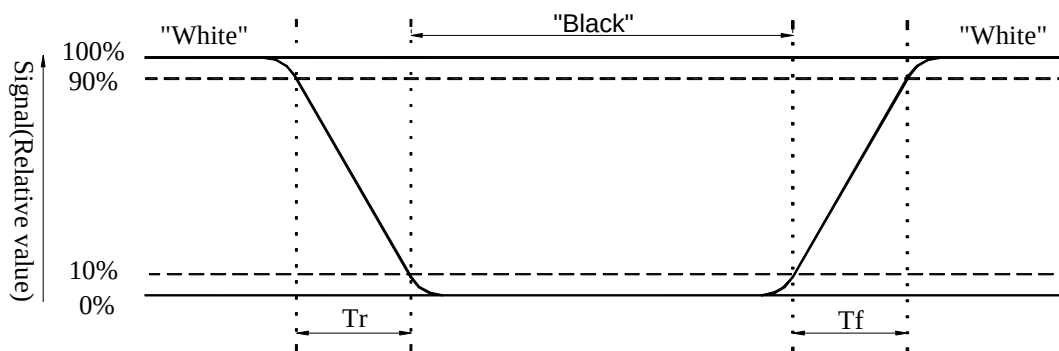

Note 5. Definition of contrast ratio:

Contrast ratio is calculated with the following formula.

$$\text{Contrast ratio (CR)} = \frac{\text{Photodetector output when LCD is at "White" state}}{\text{Photodetector output when LCD is at "Black" state}}$$

Note 6. White $V_i = V_{i50} \pm 1.5V$
Black $V_i = V_{i50} \pm 2.0V$


' $\pm$ ' means that analog input signal swings in phase with COM signal.

' $\mp$ ' means that analog input signal swings out of phase with COM signal.

V_{i50} : The analog input voltage when transmission is 50%.

The 100% transmission is defined as the transmission of LCD panel when all the input terminals of module are electrically opened.

Note 7. Definition of viewing angle:
Refer to figure as below.

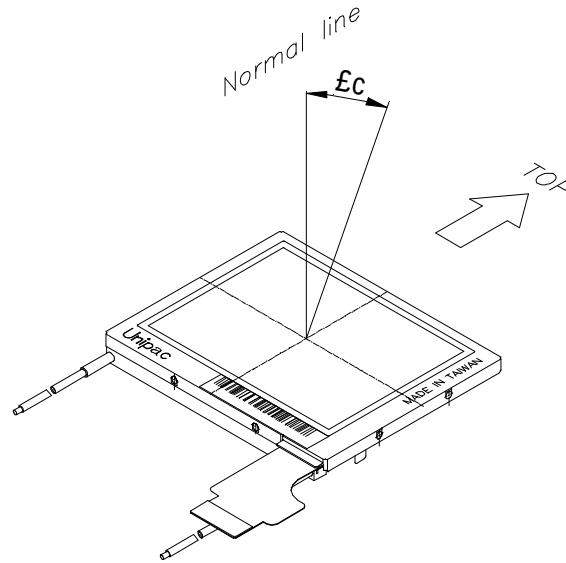


Note 8. Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.


D.Reliability test items:

No.	Test items	Conditions	Remark
1	High temperature storage	Ta = 80°C 240H	
2	Low temperature storage	Ta = -25°C 240H	
3	High temperature operation	Ta = 60°C 240H	
4	Low temperature operation	Ta = 0°C 240H	
5	High temperature and high humidity	Ta = 60°C · 95%RH 240H	Operation
6	Heat shock	-25°C ~ +80°C /50 cycles 2H/cycle	Non-operation
7	Electrostatic discharge	±200V,200pF(0Ω),once for each terminal	Non-operation
8	Vibration	Frequency range :10 ~ 55Hz Stroke :1.5mm Sweep :10 ~ 55Hz ~ 10Hz 2 hours for each direction of X,Y,Z (6 hours for total)	JIS C7021,A-10 condition A
9	Mechanical shock	100G · 6ms,±X,±Y,±Z 3 times for each direction	JIS C7021,A-7 condition C
10	Vibration (with carton)	Random vibration: 0.015G ² /Hz from 5 ~ 200Hz -6dB/Octave from 200 ~ 500Hz	IEC 68-34
11	Drop (with carton)	Height: 80cm 1 corner,3 edges,6 surfaces	

Note: Ta: Ambient temperature.

E. Packing form

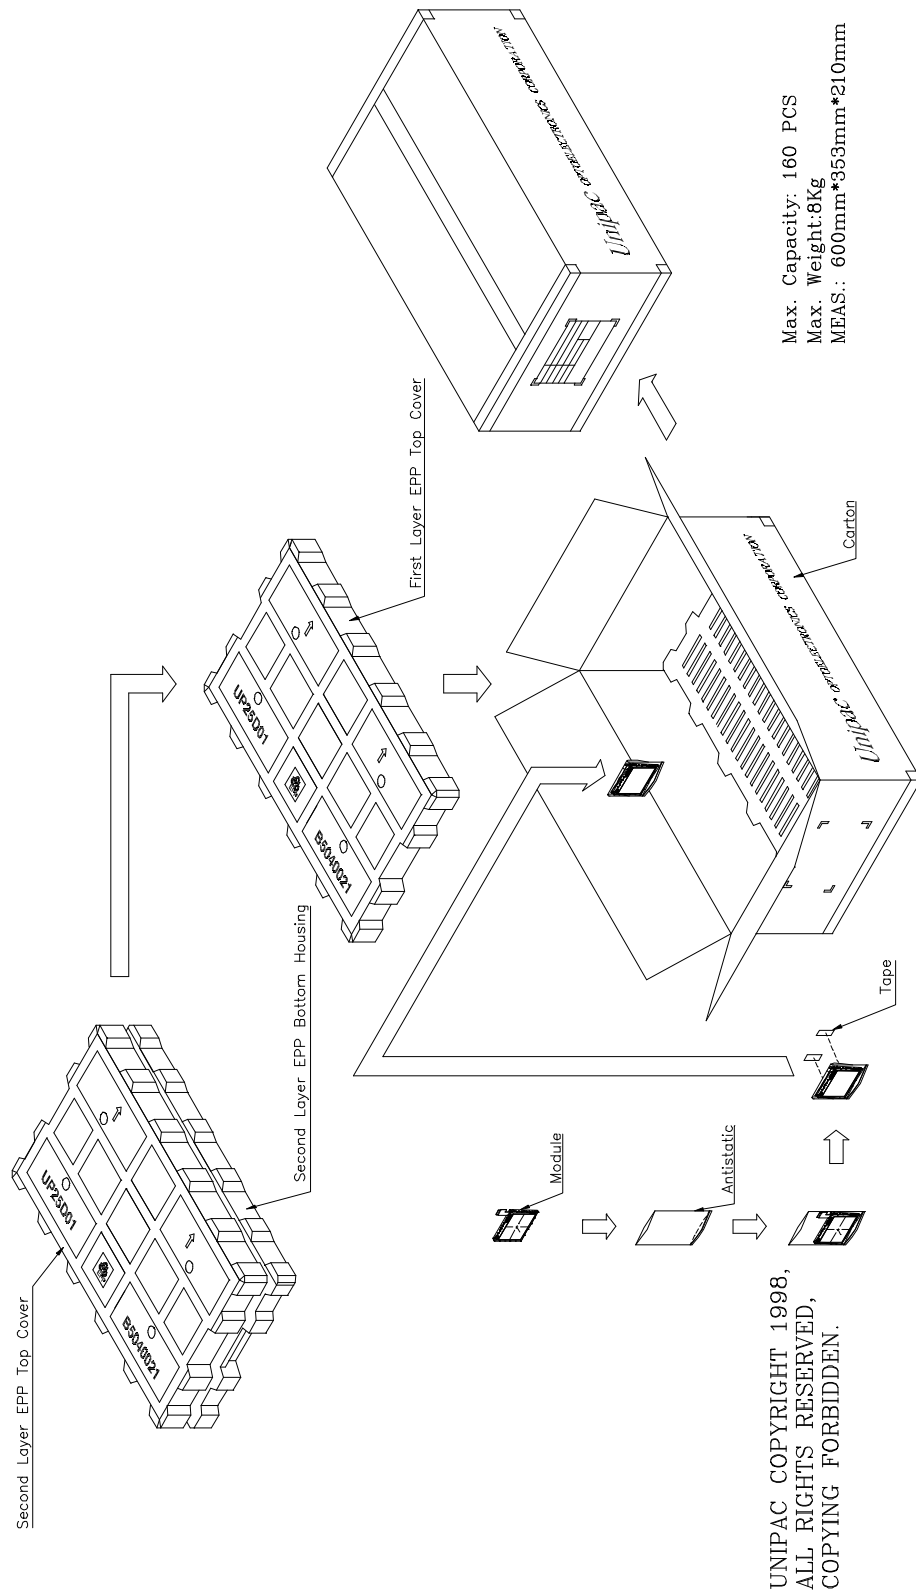

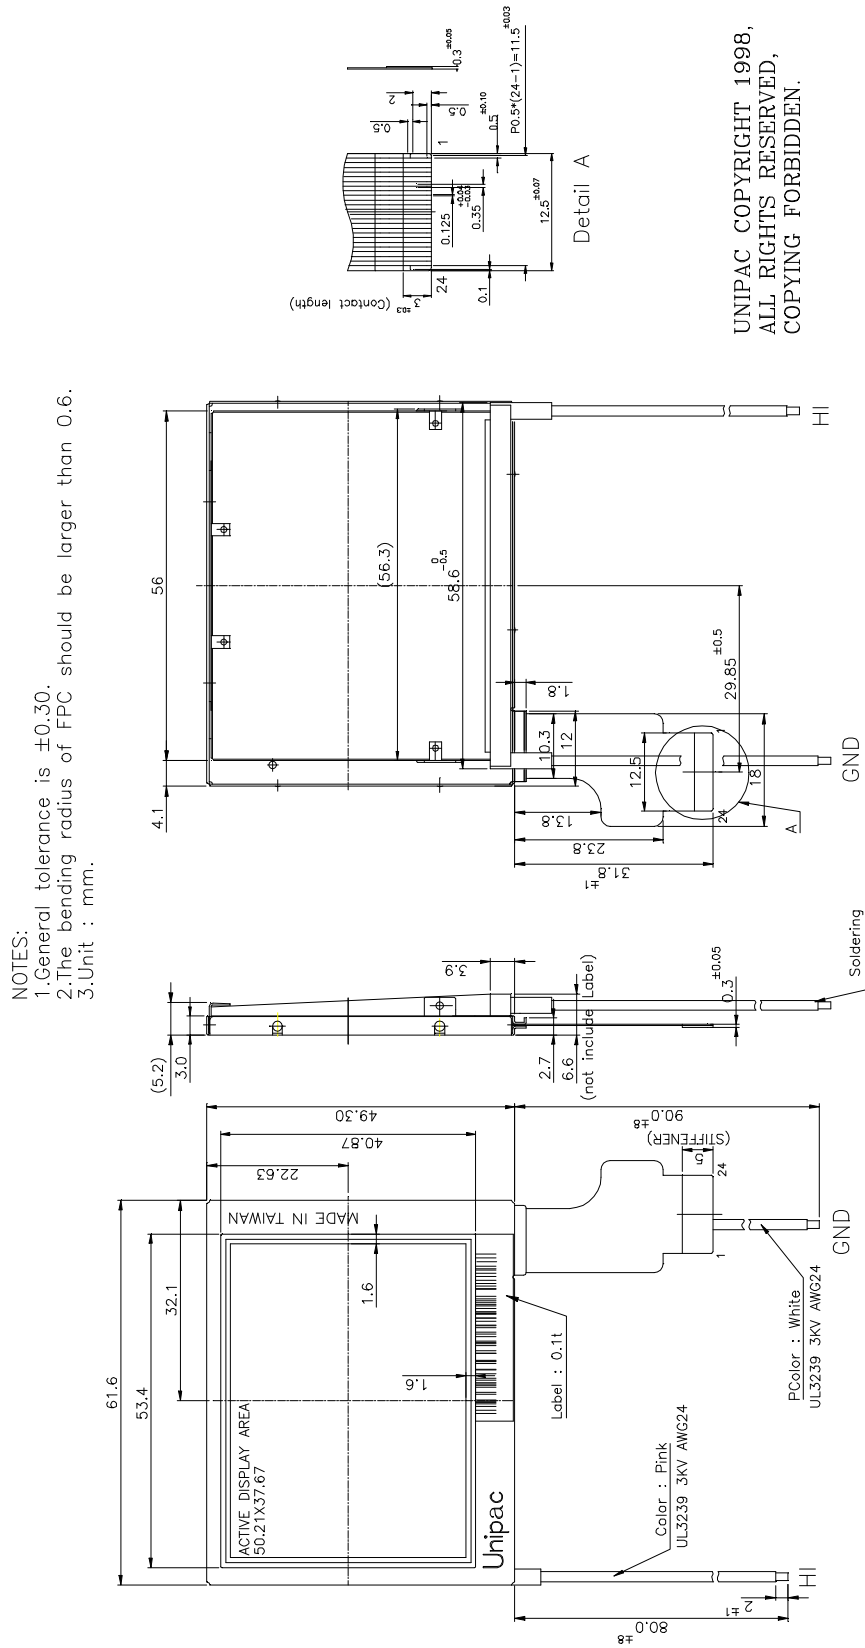

UNIPAC COPYRIGHT 1998,
ALL RIGHTS RESERVED,
COPYING FORBIDDEN.

Fig.1 Outline dimension of TFT-LCD module

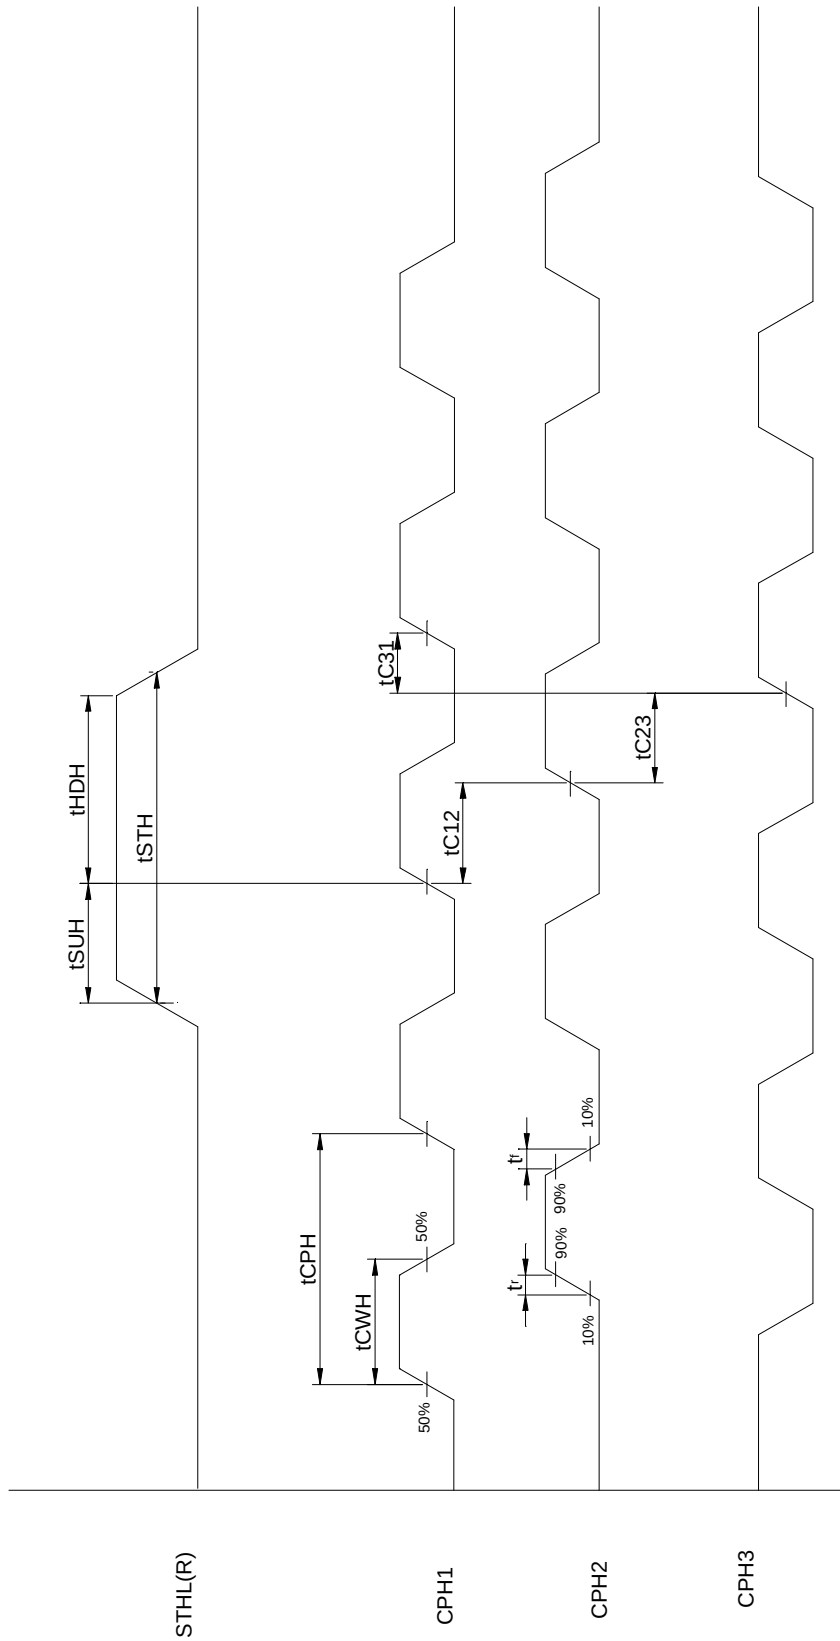


Fig.2 Sampling clock timing

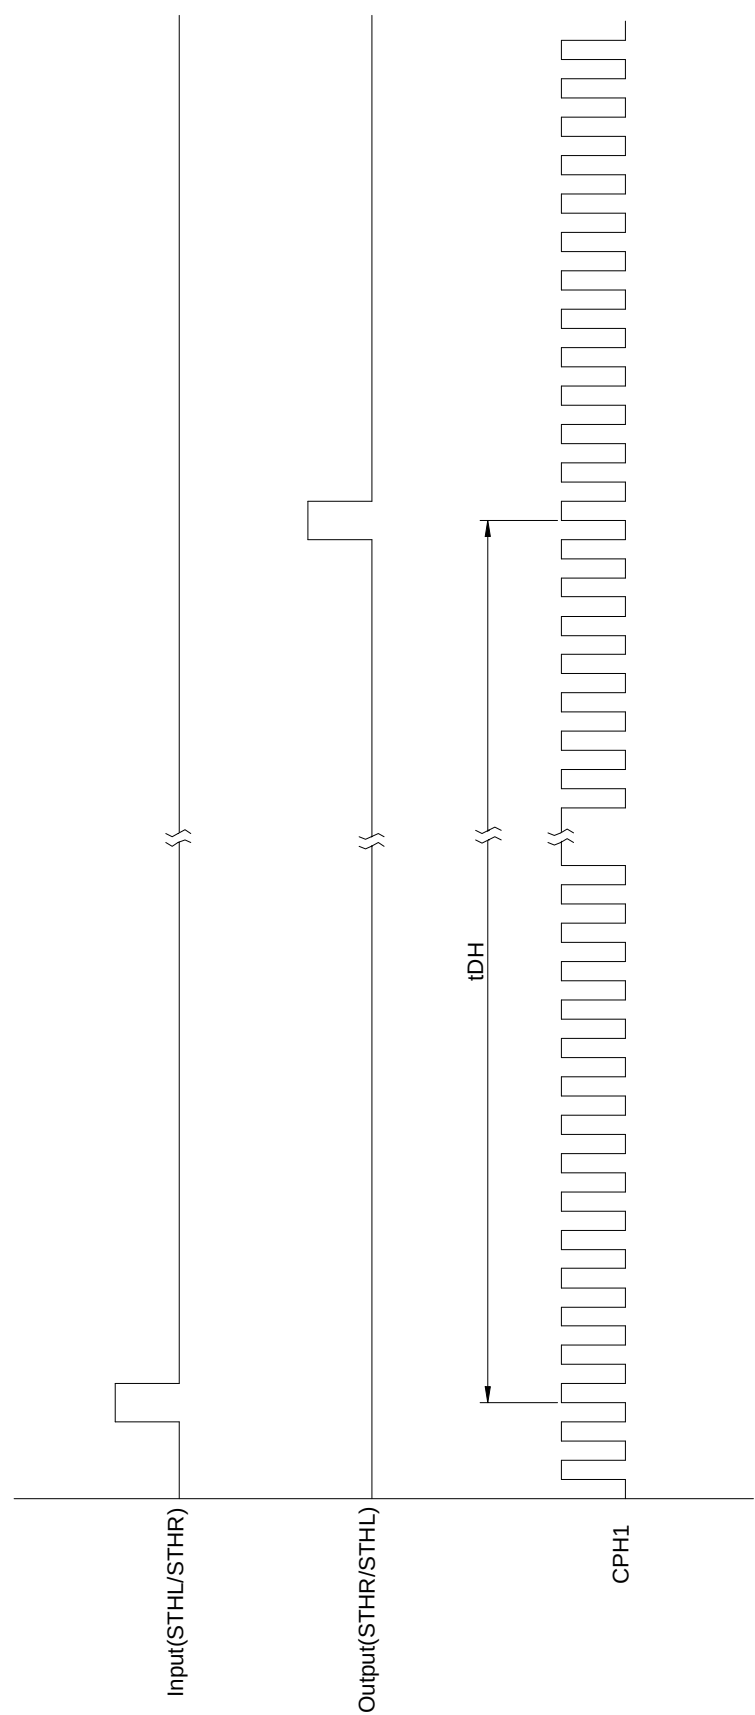


Fig.3 Horizontal display timing range


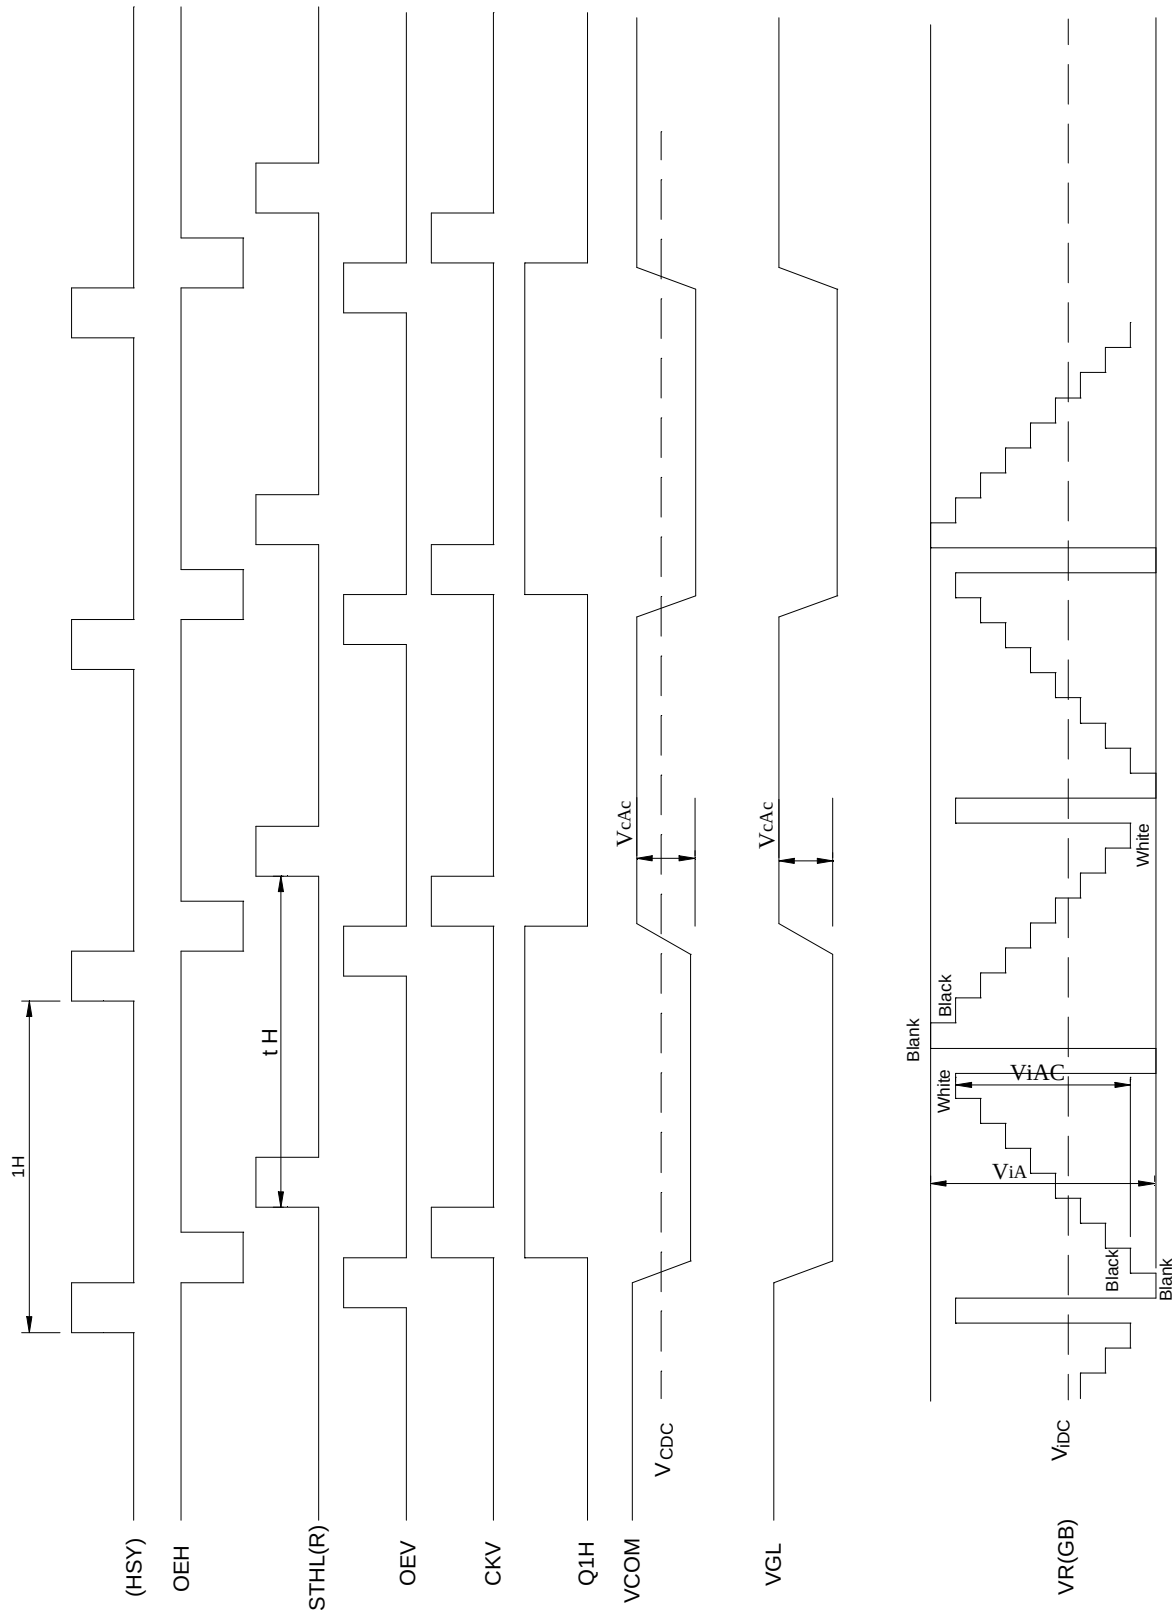


Fig.4-(a) Horizontal timing

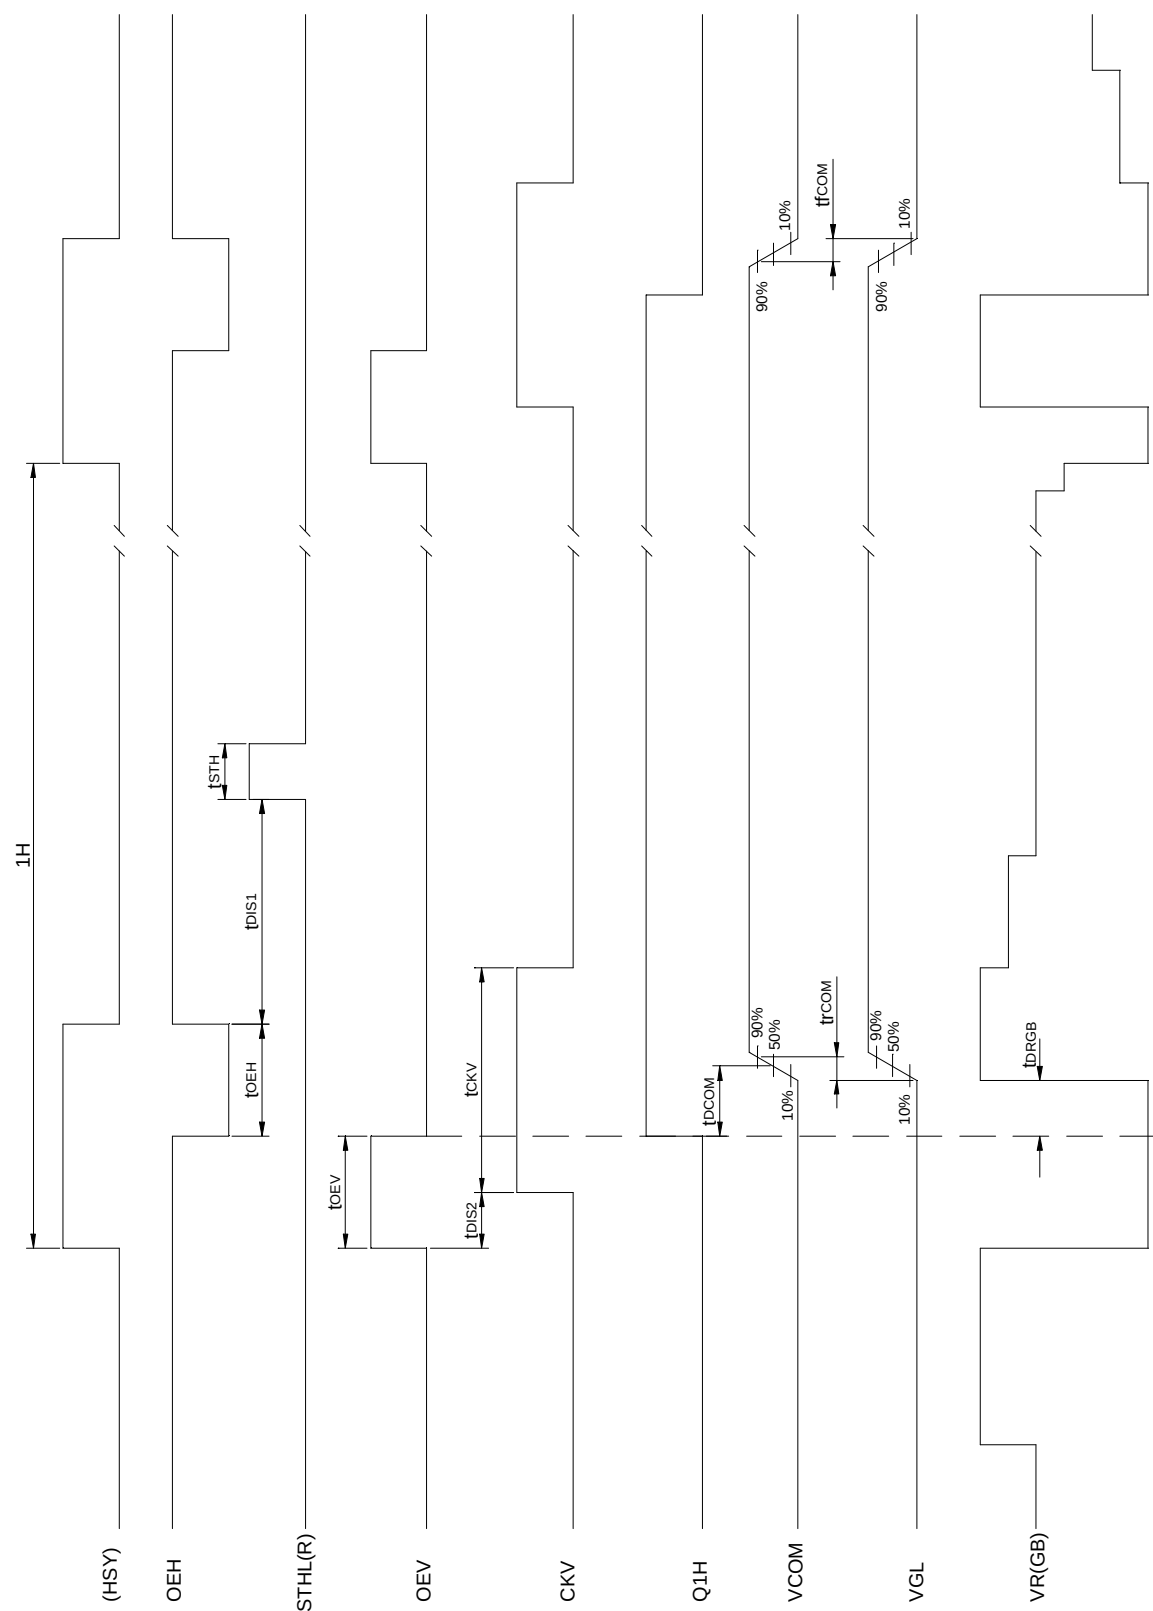

Note: The rising edge of Q1H and the falling edge of OEV should be synchronized with the falling edge of OEH

Fig.4-(b) Detail horizontal timing

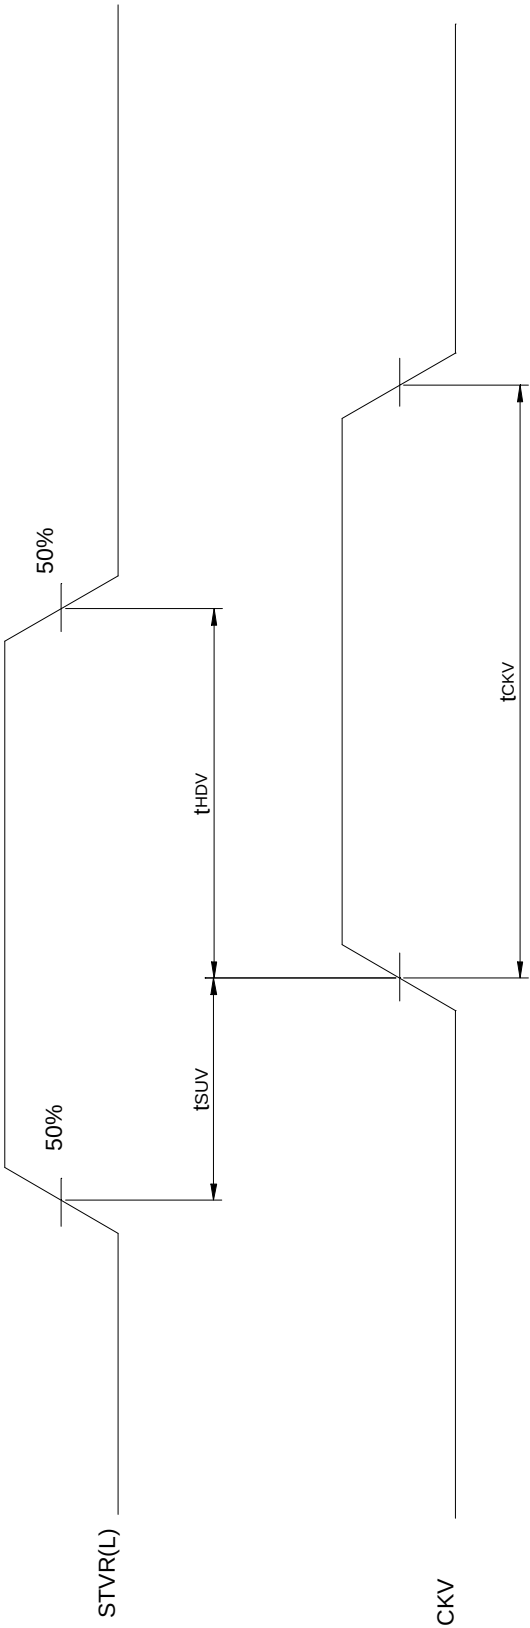


Fig.5 Vertical shift clock timing

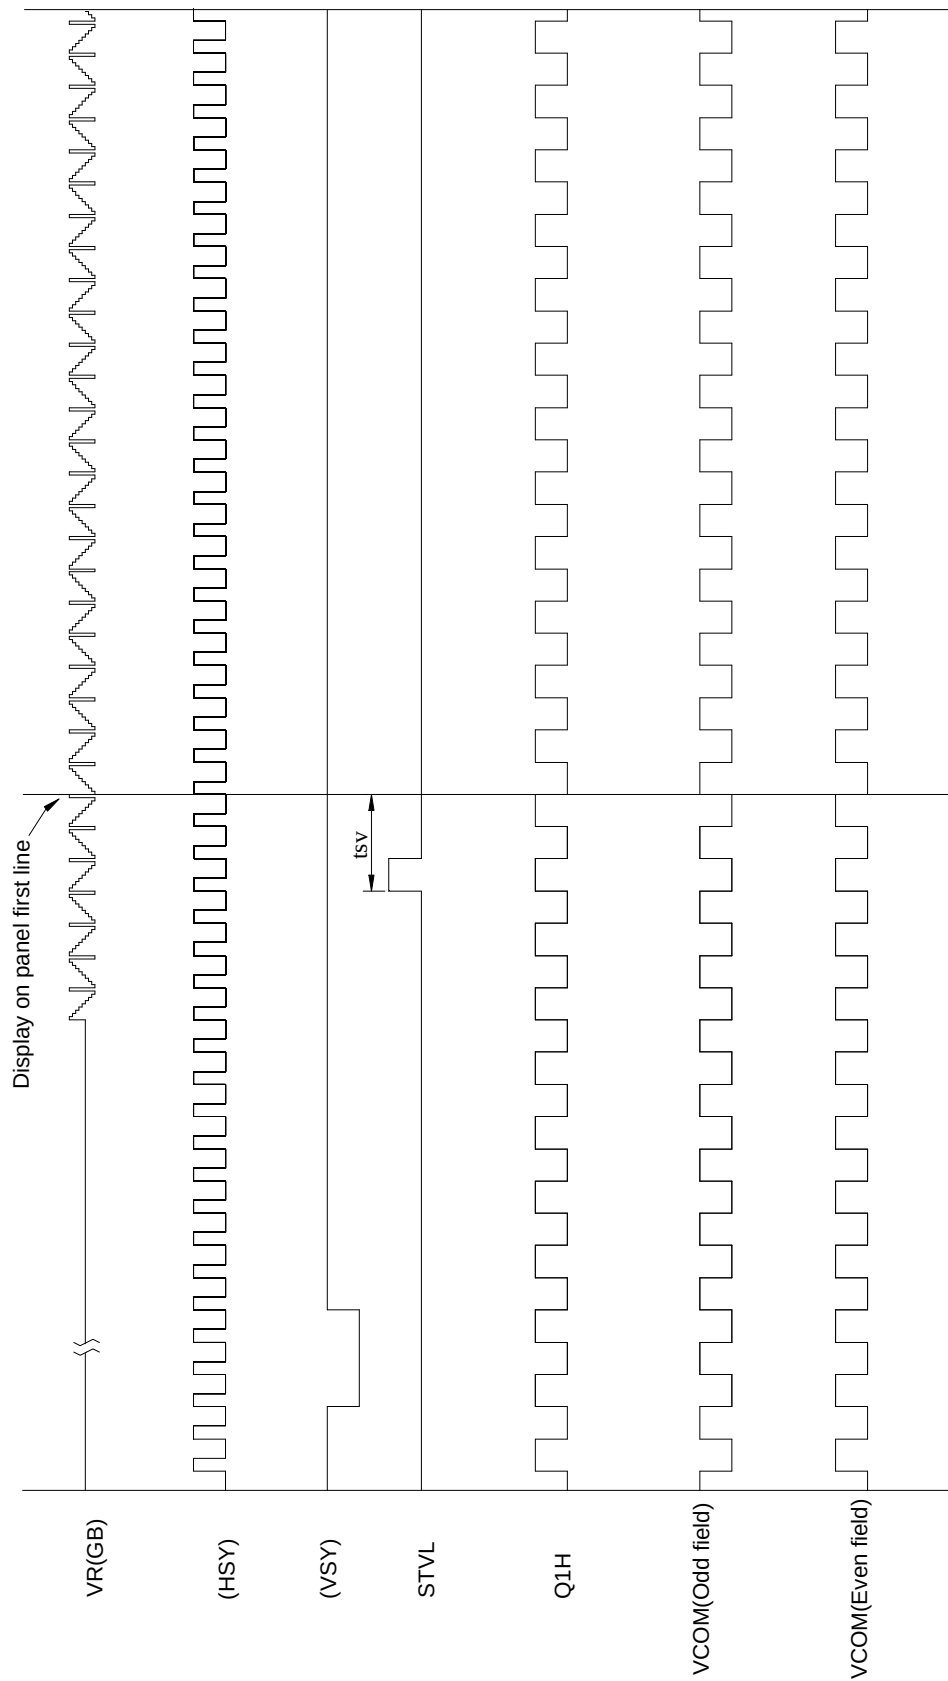


Fig.6-(a) Vertical timing (From up to down)

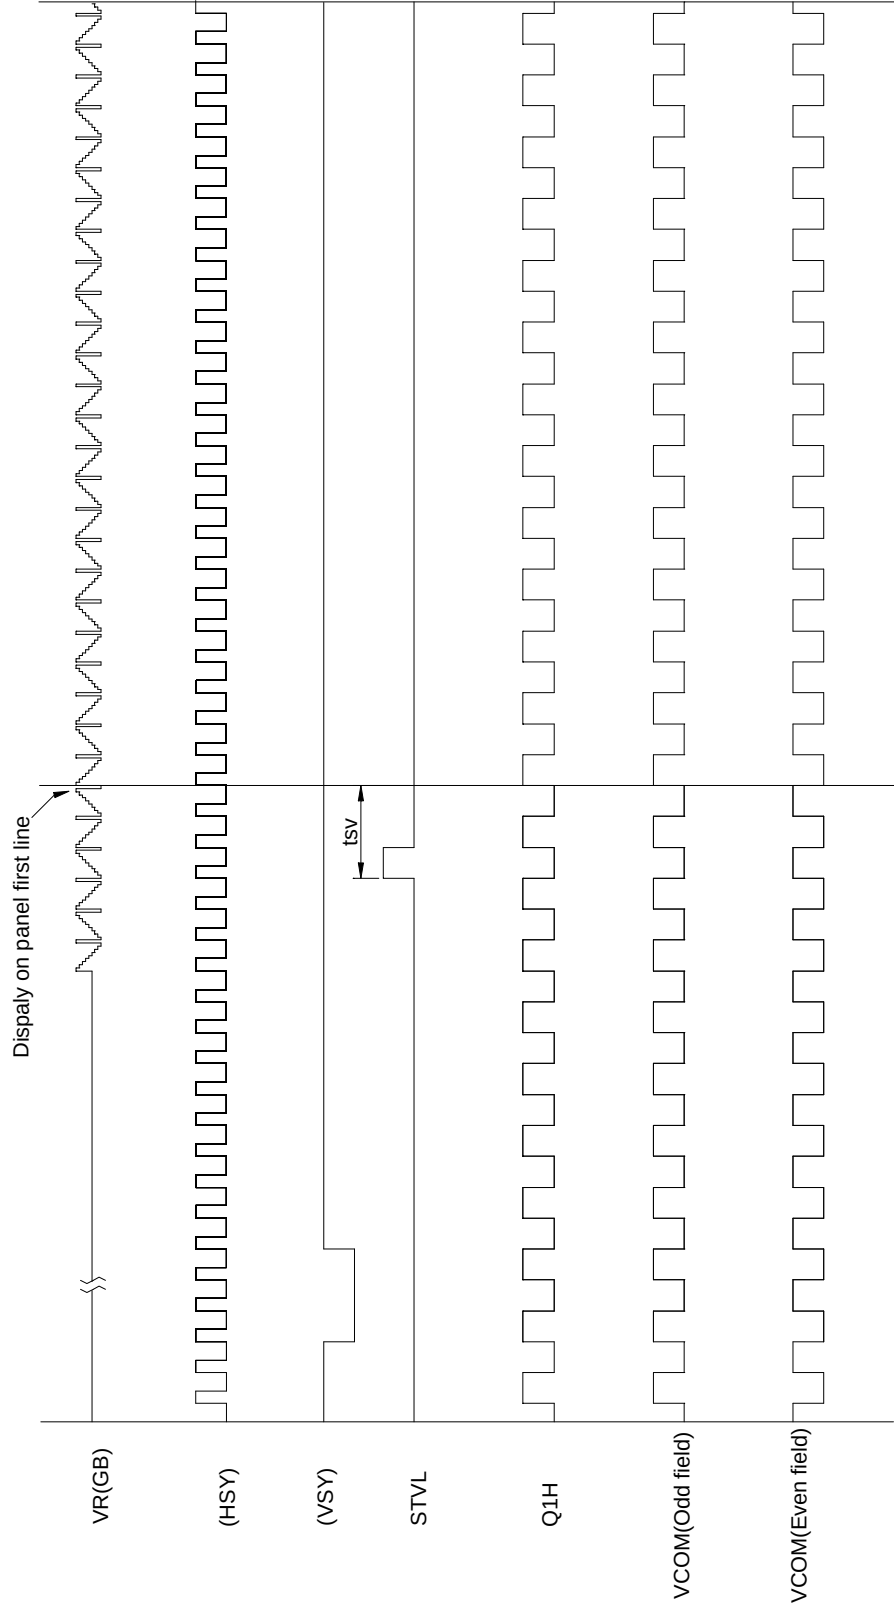


Fig.6-(b) Vertical timing (From down to up)

MINGSTAR ELECTRONIC CORP.

**365-A Cloverleaf Drive
Baldwin Park, CA 91706**

**Fax:626-369-1655
Tel :626-369-1126**